


# WPG550\*8

## DIESEL GENERATING SET

### GENERATING SET RATINGS 50Hz – 1500rpm @ 0.8p.f.

Voltage	PRP		ESP	
	kVA	kWe	kVA	kWe
415/240	500	400	550	440
400/230	500	400	550	440
380/220	500	400	550	440

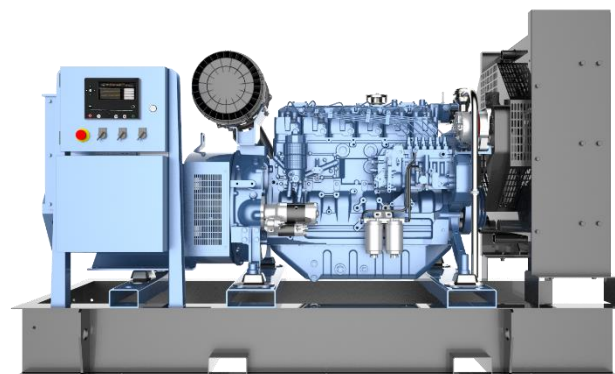

### PRODUCT FEATURES

#### Engine

- Cast iron frame style body structure
- One-piece forged crankshaft
- Split-cap forged steel connecting rods
- Separate cast iron cylinder heads with 4 valves
- Replaceable dry cylinder liners
- Aluminum alloy pistons with oil cooling gallery

#### Cooling system

- Radiator and hoses supplied separately
- Thermostatically-controlled system with belt driven coolant pump and pusher fan

#### Fuel system

- High pressure Common Rail injection system
- Duplex fine filter and water separation filter assembly with transparent cup for better efficiency

#### Lubrication system

- Flat bottom large capacity oil pan
- Spin-on full-flow lube oil filter

#### Electrical system

- 24 Vdc electric starter motor and battery charging alternator
- LOP + HWT sensors

#### Air intake and exhaust system

- Mid-position and below inlet turbocharger optimized or genset application
- Special rear mounted air filter with restriction indicator
- Exhaust manifold shield for heat isolating

#### Alternator

- Brushless, 4 Pole, IP23 drip-proof revolving field design
- Class H insulation and Class H temperature rise
- Low reactance with 2/3 pitch windings on the stator
- Direct-coupled by flexible disc
- Sustained overcurrent >300% in 10 sec
- Direct drive centrifugal blower fan cooling

#### Control module

- DSE control module is ideal for a wide control range to manage, monitor, and diagnose quickly and easily.
- Display status message Provide protection Auto shutdown at fault detection

### GENERATING SET SPECIFICATIONS

Governor and regulation class	In accordance to ISO 8528-5 Class G2 performance
Phase number and connection	3 phase, 4 wires, Y-type
Cooling method	Closed looped water-cooled
Starting method	DC 24V Electric starter
Steady-state voltage deviation	$\leq \pm 2.5\%$
Steady-state frequency band	$\leq 1.5\%$

### ENGINE

Brand / Model		BAUDOUIN/ 6M21G550/5
Gross Power	kWm	ESP - 490 / PRP - 450
Cylinder / Type / Aspiration		6 / In-line / Turbocharged and Aftercooled
Bore x Stroke	mm	127 x 165
Displacement	L	12.54
Compression ratio		15.2:1
Brake Mean Effective Pressure	kPa	ESP – 3126

### COOLING SYSTEM

Type of Coolant		Liquid (water + 50% antifreeze)
Total Cooling System Capacity (with Radiator)	L	62
Max coolant temperature – shutdown	°C	105
Cooling Fan Airflow	m <sup>3</sup> /min	474

### LUBRICATION SYSTEM

Operating Temperature range before Engine	°C	78 -105
Oil fuel consumption ratio based on engine fuel consumption data	g/kW.hr	$\leq 0.2\%$
Total system capacity (including filters)	L	38
Type of oil filter		Spin-on full flow filter

FUEL SYSTEM			
Type of fuel filter		Spin-on fuel filter	
Min. internal diameter of the supply pipe	mm	14	
Min. internal diameter of the return pipe	mm	14	
Max. fuel return restriction	Bar	0.5	
Max. fuel inlet temperature	°C	50	
Fuel supply flow	L/hr	400	
Fuel Consumption (Tolerance +3%)			
Rating		gr/kWh	L/hr
100%ESP		211	123.1
100%PRP		204.3	109.5
75% PRP		187.3	75.3
50% PRP		190.5	51
25% PRP		207.5	27.8
EXHAUST SYSTEM			
Exhaust Gas temperature after the turbocharger	°C	580	
Exhaust Gas flow	m³/min	ESP – 114.8/ PRP – 102.3	
Max. Exhaust back pressure	mBar	120	
Noise level(Open)	dB(A)@1m(75%)	105	
Noise level(Open)	dB(A)@7m(75%)	98	
Noise level(Silenced)	dB(A)@1m(75%)	85	
Noise level(Silenced)	dB(A)@7m(75%)	78	

ALTERNATOR	
Brand / Model	LEROY-SOMER / TAL A473 C
Rated Current	722A
Coupling / No. of Bearing	Direct / Single
Winding Pitch	2/3
Type of Excitation	Self-excitation
Cooling type	Air
Voltage regulation method	AVR
Insurance	Class H
Temperature rise	Class H
Protection Grade	IP23
Efficiency at 0.8p.f. @100% load	94.4%

## CONTROL MODULE DSE 6120

Back-lit LCD display

3 Phase generator and 3 Phase Mains monitoring

Monitoring speed, frequency, voltage, current, oil pressure, coolant temperature and fuel level

Display warning, shutdown and engine status information

Hours counter provides accurate information for monitoring and maintenance.



## STANDARD CONDITIONS

**Standard operating environment:** ambient temperature is 5°C~40°C, the altitude is less than 1000m, the relative humidity is less than 90%(25°C), and there is no dust, sand dust, salt fog, mold, condensation environment, etc.

**If the operating environment exceeds the above requirements, please contact the factory and consult.**



Ambient adaptability protection measures for alternators		
Ambient type	Ambient description	Measures of protection
General Ambient	The air is clean and dry, the humidity is $\leq 90\%$ , and the distance from the coastline is $\geq 30\text{km}$ ; Non-industrial ambient (chemical splash, acid-base steam, corrosive environment, etc.)	standard configuration
Humid Ambient	The humidity above 90% or condensation occurs	Anti-condensation heating (Optional)
Salt spray Ambient	Salt fog crystals are produced in seaside ( $< 30\text{km}$ from the coastline) or island Ambient	Anti-condensation heating; (Optional) Spray three-proof paint on winding surface; (Optional) Spraying epoxy protection for parts and structures. (Optional)
Dust Ambient	The ambient where mining, building construction, desert Gobi or sandstorm occur	Standard IP23 protection Improve the protection level of the alternator to IP44; (Optional)
If you need to use protective measures beyond the standard, please contact the factory and consult.		

Special working condition
<p>If the operating conditions of the generator meet the following conditions, please contact the factory and consult.</p> <ul style="list-style-type: none"> <li>➤ Multistage parallel operation</li> <li>➤ Grid-connected operation</li> <li>➤ As the main power supply, it runs continuously for a long time</li> <li>➤ The load includes a high power motor type load</li> <li>➤ Capacitive load</li> <li>➤ Special ambient such as high temperature, cold and plateau</li> </ul>

## Ratings definitions

**Emergency Standby Power (ESP):**


Emergency Standby Power is the maximum power available for a varying load for the duration of a main power network failure. The average load factor over 24 hours of operation should not exceed 70% of the engine's ESP power rating.

Typical operational hours of the engine are 200 hours per year, with a maximum usage of 500 hours per year. This includes an annual maximum of 25 hours per year at the ESP power rating. No overload capability is allowed. The engine is not to be used for sustained utility paralleling applications.


**Prime power (PRP):**

Prime Power is the maximum power available for unlimited hours of usage in a variable load application. The average load factor should not exceed 70% of the engine's PRP power rating during any 24 hour period. An overload capability of 10% is available; however, this is limited to 1 hour within every 12 hour period.

**Open genset**

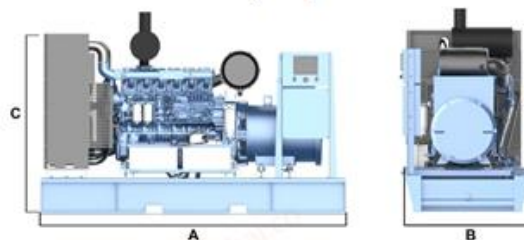

**Silence genset**

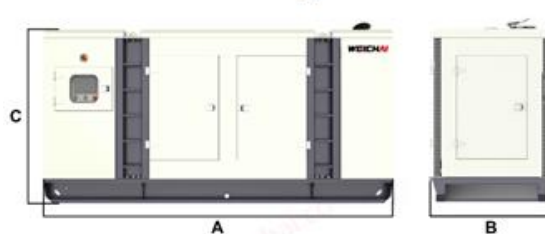

This outline drawing is to provide representative configuration details for Model series only. See respective model data sheet for specific model outline drawing number.

Do not use for installation design

## Dimension and Weight

Structure	Model	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry wt.* kg	Tank capacity L
Open	WPG550F8	3200	1396	2024	3280	440
Silenced	WPG550L8	4550	1550	2100	4280	700

\* Note: Weights represent a set with standard features. See outline drawings for weights of other configurations.

## Codes and standards

<b>ISO 9001</b>	This generating set is designed and manufactured in facilities certified to ISO 9001.	<b>ISO 8528</b>	This generating set has been designed to comply with ISO 8528 regulation.

For more information contact your local Weichai distributor or visit [www.weichai.com](http://www.weichai.com)

Version number :2024.7.25